



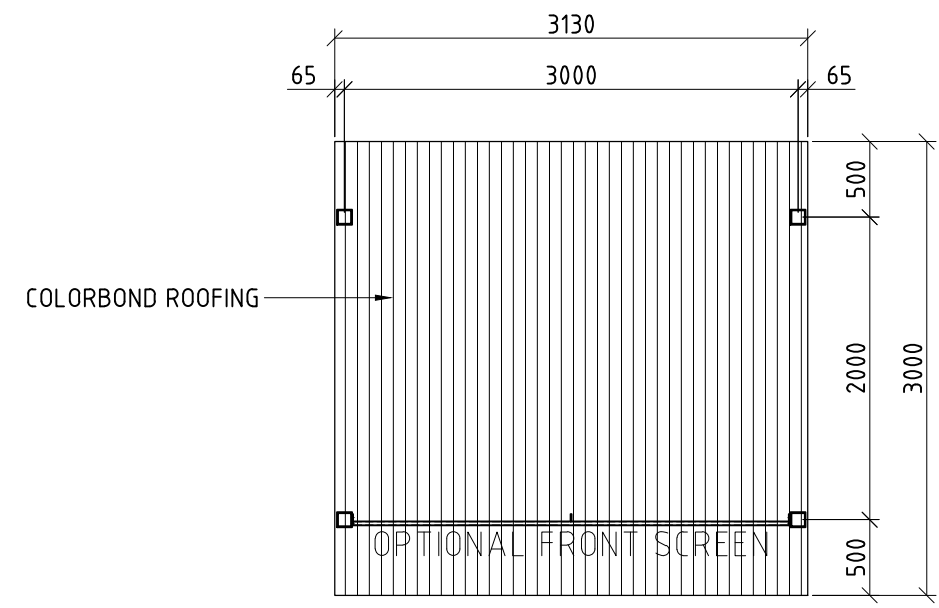


PLAN
SCALE (1:50)

- GENERAL NOTES:**
1. DURING CONSTRUCTION THE STRUCTURE SHALL BE MAINTAINED IN A STABLE CONDITION AND NO PART SHALL BE OVER STRESSED.
 2. PRIOR TO COMMENCEMENT OF WORKS THE BUILDER SHALL SATISFY THEMSELVES OF THE CORRECT LOCATIONS OF ALL EXISTING SERVICES WHETHER INDICATED OR NOT ON THE PLANS.
 3. LOCATING OF THE STRUCTURE, INCLUDING CO-ORDINATES IF APPLICABLE, IS THE RESPONSIBILITY OF THE CLIENT AND/OR THE CLIENT'S SITE REPRESENTATIVE.
 4. STRUCTURE HAS BEEN DESIGNED AS A CLASS 10A STRUCTURE AND IN ACCORDANCE TO THE FOLLOWING AUSTRALIAN STANDARDS:
 - AS1170.1, AS1170.2, AS1720.1, AS3600 AND AS4100, AS1664.
 5. STRUCTURE IS SUITABLE FOR N3 AREAS AND HAS BEEN DESIGNED WITH AN ANNUAL RECCURANCE INTERVAL OF 100 YEARS.
 6. SITE COVERAGE IS 9.39 m² (ROOF AREA).
 7. THE FOOTING HAS BEEN DESIGNED ASSUMING:
 - SITE CLASS S OR M OR H
 - ALLOWABLE SOIL BEARING CAPACITY OF 100kPa
 - SOIL ADHESION OF 10kPa(TO BE VERIFIED ON SITE).
 8. FOR SLABS ON GROUND, ALL TOPSOIL AND UPPER STRATA CONTAINING SOFT OR ORGANIC MATTER ARE TO BE REMOVED AND REPLACED WITH SELECT COMPACTED FILL.
 9. ALL FILL TO BE CLEAN, PLACED IN LAYERS NOT EXCEEDING 200mm AND COMPACTED TO 95% STANDARD COMPACTION.
 10. EARTHWORKS SHALL BE CARRIED OUT IN ACCORDANCE WITH CRITERIA AND PROCEDURES SET OUT IN AS3798 *GUIDELINES ON EARTHWORKS FOR COMMERCIAL AND RESIDENTIAL DEVELOPMENTS*.

PRELIMINARY DRAWING ONLY - NOT FOR CONSTRUCTION

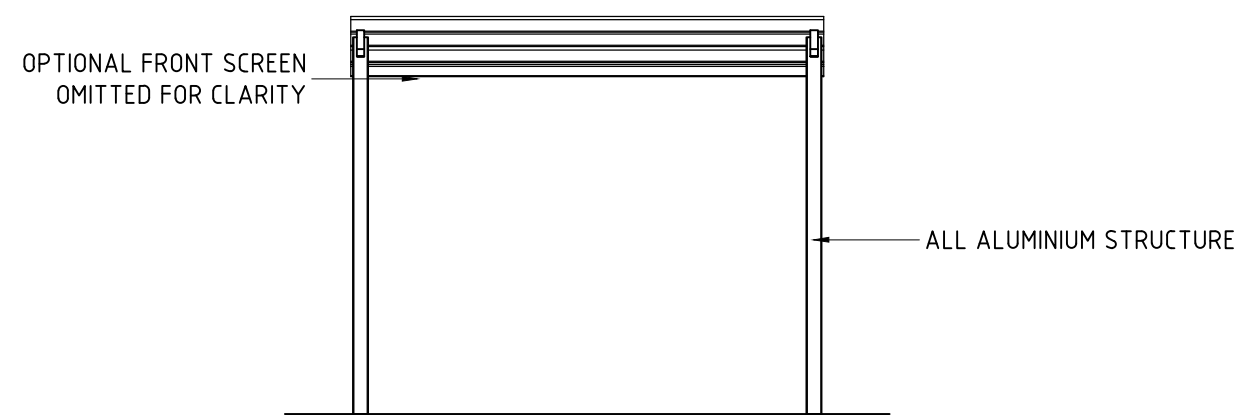


FRONT ELEVATION
SCALE (1:50)

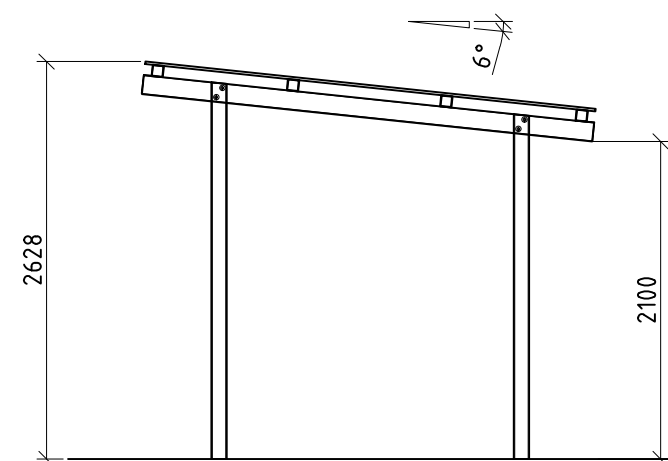

END ELEVATION
SCALE (1:50)

5					THIRD ANGLE PROJECTION U.N.O.	 NCS INTERNATIONAL CERTIFIED SAFETY MANAGEMENT SYSTEM AS/NZS 4801	 NCS INTERNATIONAL CERTIFIED QUALITY MANAGEMENT SYSTEM ISO 9001	 Enhancing Open Space Environments Landmark Products Limited. PH: 1300 768 230 A.B.N. 99 112 000 843 FAX: 1300 768 260 55-57 Kabi Circuit, Deception Bay www.landmarkpro.com.au P.O. Box 603, Deception Bay landmark@landmarkpro.com.au Queensland 4508	DRAWN MAF	CLIENT NAME LANDMARK PRODUCTS LIMITED			
4									CHECKED -	PROJECT STANDARD K690 "BRIGHTON" SHELTER RANGE K691 BRIGHTON,AP, IG, S/S FIXINGS			
3				mm	ALL DIMENSIONS IN MILLIMETRES U.N.O. DO NOT SCALE FROM DRAWINGS IF IN DOUBT, ASK				DATE -	DRAWING TITLE PRELIM - PLAN & ELEVATIONS	DRAWING NUMBER K6914A*A*IM*	SHEET 001	REVISION 0
2									© LANDMARK PRODUCTS LIMITED THIS DOCUMENT REMAINS THE PROPERTY OF LANDMARK PRODUCTS LIMITED. UNAUTHORISED USE OF THIS DOCUMENT IN ANY FORM IS PROHIBITED.				
1								PAGE A3					
REVISION				DRAWN	DATE								



OPTIONAL FRONT SCREEN





FRONT ELEVATION



END ELEVATION

- PRELIMINARY DRAWING ONLY - NOT FOR CONSTRUCTION**

5					THIRD ANGLE PROJECTION U.N.O.	 CERTIFIED SAFETY MANAGEMENT SYSTEM AS/NZS 4801	 CERTIFIED QUALITY MANAGEMENT SYSTEM ISO 9001	 Landmark Enhancing Open Space Environments Landmark Products Limited. PH: 1300 768 230 A.B.N. 99 112 000 843 FAX: 1300 768 260 55-57 Kabi Circuit, Deception Bay P.O. Box 603, Deception Bay www.landmarkpro.com.au Queensland 4508 landmark@landmarkpro.com.au	DRAWN	CLIENT NAME						
4										MAF	LANDMARK PRODUCTS LIMITED					
3										CHECKED	PROJECT					
2										-	STANDARD K690 "BRIGHTON" SHELTER RANGE K692 BRIGHTON,AP, IG, S/S FIXINGS					
1				mm	ALL DIMENSIONS IN MILLIMETRES U.N.O. DO NOT SCALE FROM DRAWINGS IF IN DOUBT, ASK				SCALE	DRAWING TITLE		DRAWING NUMBER		SHEET	REVISION	
	REVISION	DRAWN	DATE		THIS DOCUMENT REMAINS THE PROPERTY OF LANDMARK PRODUCTS LIMITED. UNAUTHORISED USE OF THIS DOCUMENT IN ANY FORM IS PROHIBITED.	© LANDMARK PRODUCTS LIMITED				NOTED	PRELIM - PLAN & ELEVATIONS		K6924A*A*IM*		001	0
									PAGE							
									A3							

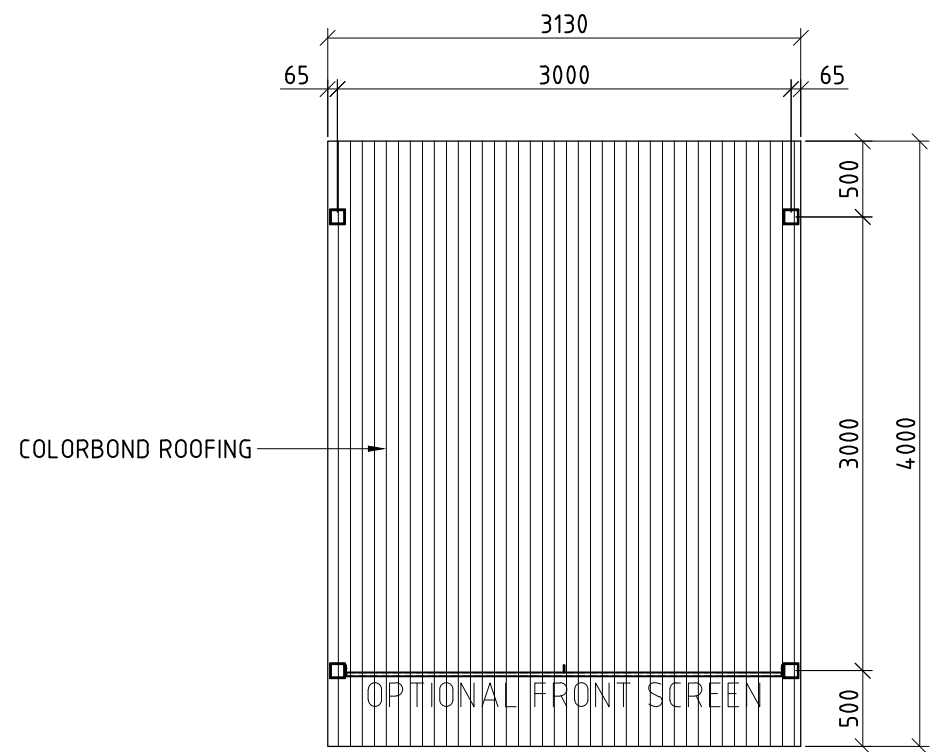


PLAN
SCALE (1:50)


GENERAL NOTES:


1. DURING CONSTRUCTION THE STRUCTURE SHALL BE MAINTAINED IN A STABLE CONDITION AND NO PART SHALL BE OVER STRESSED.
2. PRIOR TO COMMENCEMENT OF WORKS THE BUILDER SHALL SATISFY THEMSELVES OF THE CORRECT LOCATIONS OF ALL EXISTING SERVICES WHETHER INDICATED OR NOT ON THE PLANS.
3. LOCATING OF THE STRUCTURE, INCLUDING CO-ORDINATES IF APPLICABLE, IS THE RESPONSIBILITY OF THE CLIENT AND/OR THE CLIENT'S SITE REPRESENTATIVE.
4. STRUCTURE HAS BEEN DESIGNED AS A CLASS 10A STRUCTURE AND IN ACCORDANCE TO THE FOLLOWING AUSTRALIAN STANDARDS:
 - AS1170.1, AS1170.2, AS1720.1, AS3600 AND AS4100, AS1664.
5. STRUCTURE IS SUITABLE FOR N3 AREAS AND HAS BEEN DESIGNED WITH AN ANNUAL RECCURANCE INTERVAL OF 100 YEARS.
6. SITE COVERAGE IS 12.52 m² (ROOF AREA).
7. THE FOOTING HAS BEEN DESIGNED ASSUMING:
 - SITE CLASS S OR M OR H
 - ALLOWABLE SOIL BEARING CAPACITY OF 100kPa
 - SOIL ADHESION OF 10kPa(TO BE VERIFIED ON SITE).
8. FOR SLABS ON GROUND, ALL TOPSOIL AND UPPER STRATA CONTAINING SOFT OR ORGANIC MATTER ARE TO BE REMOVED AND REPLACED WITH SELECT COMPACTED FILL.
9. ALL FILL TO BE CLEAN, PLACED IN LAYERS NOT EXCEEDING 200mm AND COMPACTED TO 95% STANDARD COMPACTION.
10. EARTHWORKS SHALL BE CARRIED OUT IN ACCORDANCE WITH CRITERIA AND PROCEDURES SET OUT IN AS3798 *GUIDELINES ON EARTHWORKS FOR COMMERCIAL AND RESIDENTIAL DEVELOPMENTS*.

PRELIMINARY DRAWING ONLY - NOT FOR CONSTRUCTION

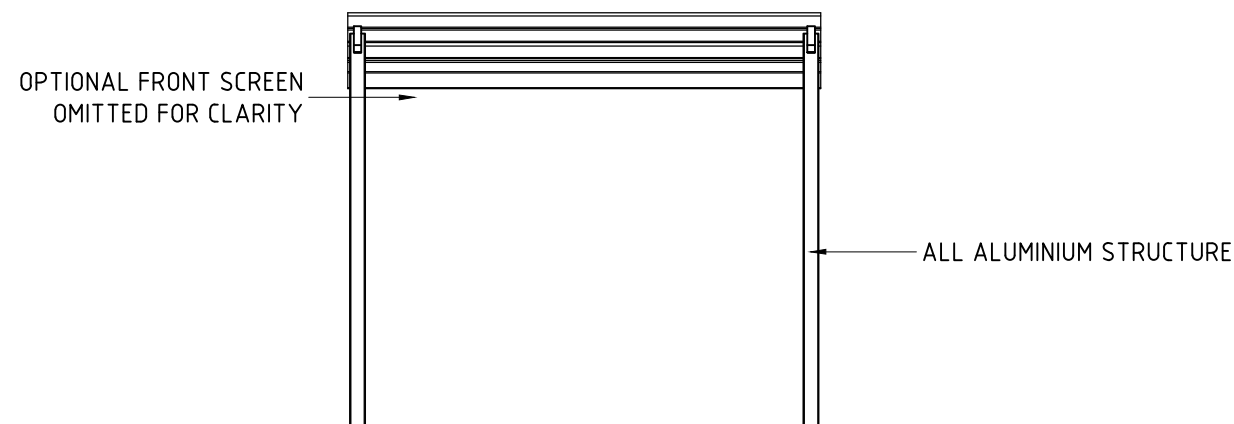


FRONT ELEVATION
SCALE (1:50)

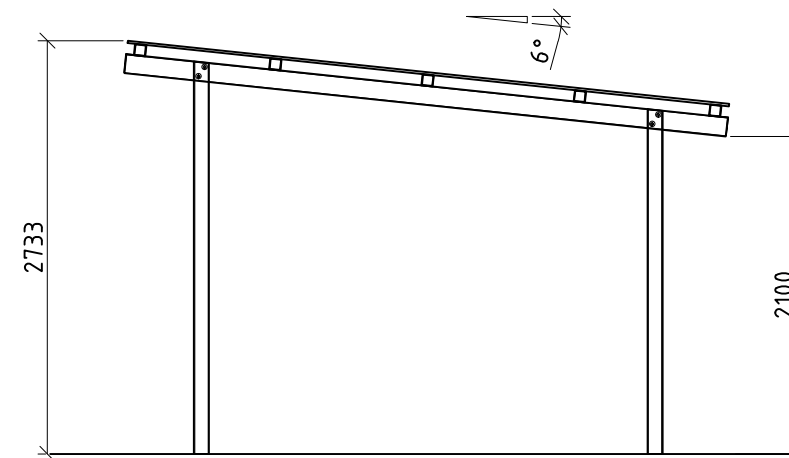

5					THIRD ANGLE PROJECTION U.N.O.	 CERTIFIED SAFETY MANAGEMENT SYSTEM AS/NZS 4801	 CERTIFIED QUALITY MANAGEMENT SYSTEM ISO 9001	 Enhancing Open Space Environments Landmark Products Limited. PH: 1300 768 230 A.B.N. 99 112 000 843 FAX: 1300 768 260 55-57 Kabi Circuit, Deception Bay P.O. Box 603, Deception Bay www.landmarkpro.com.au Queensland 4508 landmark@landmarkpro.com.au
4								
3				mm	ALL DIMENSIONS IN MILLIMETRES U.N.O. DO NOT SCALE FROM DRAWINGS IF IN DOUBT, ASK			
2								
1				© LANDMARK PRODUCTS LIMITED		 CERTIFIED SAFETY MANAGEMENT SYSTEM AS/NZS 4801	 CERTIFIED QUALITY MANAGEMENT SYSTEM ISO 9001	 Enhancing Open Space Environments Landmark Products Limited. PH: 1300 768 230 A.B.N. 99 112 000 843 FAX: 1300 768 260 55-57 Kabi Circuit, Deception Bay P.O. Box 603, Deception Bay www.landmarkpro.com.au Queensland 4508 landmark@landmarkpro.com.au
REVISION				DRAWN	DATE			

DRAWN	CLIENT NAME		
MAF	LANDMARK PRODUCTS LIMITED		
CHECKED	-		
DATE	PROJECT		
-	STANDARD K690 "BRIGHTON" SHELTER RANGE		
SCALE	K694 BRIGHTON,AP, IG, S/S FIXINGS		
NOTED	DRAWING TITLE	DRAWING NUMBER	SHEET
PAGE	PRELIM - PLAN & ELEVATIONS	K6944A*A*IM*	001
A3			0



SCALE (1:50)




SCALE (1:50)



2100

- PRELIMINARY DRAWING ONLY - NOT FOR CONSTRUCTION**

5					THIRD ANGLE PROJECTION U.N.O.	 	 Enhancing Open Space Environments	DRAWN	CLIENT NAME					
4								MAF	LANDMARK PRODUCTS LIMITED					
3								CHECKED	PROJECT					
2								-	STANDARD K690 "BRIGHTON" SHELTER RANGE					
1				mm	ALL DIMENSIONS IN MILLIMETRES U.N.O. DO NOT SCALE FROM DRAWINGS IF IN DOUBT, ASK			DATE	-	K695 BRIGHTON,AP, IG, S/S FIXINGS				
					© LANDMARK PRODUCTS LIMITED			SCALE		DRAWING TITLE		DRAWING NUMBER	SHEET	REVISION
	REVISION		DRAWN	DATE	THIS DOCUMENT REMAINS THE PROPERTY OF LANDMARK PRODUCTS LIMITED. UNAUTHORISED USE OF THIS DOCUMENT IN ANY FORM IS PROHIBITED.			NOTED		PRELIM - PLAN & ELEVATIONS		K6954A*A*IM*	001	0
								PAGE	A3					





SCALE (1:50)

1. DURING CONSTRUCTION THE STRUCTURE SHALL BE MAINTAINED IN A STABLE CONDITION AND NO PART SHALL BE OVER STRESSED.
2. PRIOR TO COMMENCEMENT OF WORKS THE BUILDER SHALL SATISFY THEMSELVES OF THE CORRECT LOCATIONS OF ALL EXISTING SERVICES WHETHER INDICATED OR NOT ON THE PLANS.
3. LOCATING OF THE STRUCTURE, INCLUDING CO-ORDINATES IF APPLICABLE, IS THE RESPONSIBILITY OF THE CLIENT AND/OR THE CLIENT'S SITE REPRESENTATIVE.
4. STRUCTURE HAS BEEN DESIGNED AS A CLASS 10A STRUCTURE AND IN ACCORDANCE TO THE FOLLOWING AUSTRALIAN STANDARDS:
 - AS1170.1, AS1170.2, AS1720.1, AS3600 AND AS4100, AS1664.
5. STRUCTURE IS SUITABLE FOR N3 AREAS AND HAS BEEN DESIGNED WITH AN ANNUAL RECCURANCE INTERVAL OF 100 YEARS.
6. SITE COVERAGE IS 26 m² (ROOF AREA).
7. THE FOOTING HAS BEEN DESIGNED ASSUMING:
 - SITE CLASS S OR M OR H
 - ALLOWABLE SOIL BEARING CAPACITY OF 100kPa
 - SOIL ADHESION OF 10kPa(TO BE VERIFIED ON SITE).
8. FOR SLABS ON GROUND, ALL TOPSOIL AND UPPER STRATA CONTAINING SOFT OR ORGANIC MATTER ARE TO BE REMOVED AND REPLACED WITH SELECT COMPACTED FILL.
9. ALL FILL TO BE CLEAN, PLACED IN LAYERS NOT EXCEEDING 200mm AND COMPACTED TO 95% STANDARD COMPACTION.
10. EARTHWORKS SHALL BE CARRIED OUT IN ACCORDANCE WITH CRITERIA AND PROCEDURES SET OUT IN AS3798 *GUIDELINES ON EARTHWORKS FOR COMMERCIAL AND RESIDENTIAL DEVELOPMENTS.*

SCALE (1:50)

Technical drawing of a roof structure. The drawing shows a cross-section of a roof with a 6° slope. The vertical height is dimensioned as 2733, and the horizontal span is dimensioned as 2100. The roof structure includes a main beam and a secondary beam, with a 6° angle indicated between the main beam and the horizontal.

5					THIRD ANGLE PROJECTION U.N.O.	 CERTIFIED SAFETY MANAGEMENT SYSTEM AS/NZS 4801	 CERTIFIED QUALITY MANAGEMENT SYSTEM ISO 9001	 Landmark Enhancing Open Space Environments	DRAWN	CLIENT NAME					
4										MAF	LANDMARK PRODUCTS LIMITED				
3										CHECKED	PROJECT				
2										DATE	STANDARD K690 "BRIGHTON" SHELTER RANGE K696 BRIGHTON,AP, IG, S/S FIXINGS				
1				mm	ALL DIMENSIONS IN MILLIMETRES U.N.O. DO NOT SCALE FROM DRAWINGS IF IN DOUBT, ASK				SCALE	DRAWING TITLE		DRAWING NUMBER		SHEET	REVISION
	REVISION	DRAWN	DATE	© LANDMARK PRODUCTS LIMITED THIS DOCUMENT REMAINS THE PROPERTY OF LANDMARK PRODUCTS LIMITED. UNAUTHORISED USE OF THIS DOCUMENT IN ANY FORM IS PROHIBITED.					PAGE	PRELIM - PLAN & ELEVATIONS		K6964A*A*IM*		001	0